

COIL CLEANER

Heat Exchanger Descaler



TRUCKMOUNT
SERVICE

Coil Cleaner is specially designed for use in truckmounted carpet cleaning extractors to remove hard water build up and chemical deposits from heat exchangers. Regular use of Coil Cleaner will help prevent heat loss and plugged heat exchangers.

- **Powerful descaler for heat exchangers**
- **Dissolves hard water deposits and chemical build up**
- **Contains phosphoric acid**
- **Non-fuming**
- **Available in: 4 L (1.06 US gal.) or 20 L (5.28 US gal.)**

PREVENT HEAT LOSS, PLUGGED HEAT EXCHANGERS, AND AVOID COSTLY DOWN TIME

DIRECTIONS FOR USE:

Use full strength, do not dilute.

Circulate Esteam Coil Cleaner through the heat exchanger system for 15 minutes. If circulation is not possible, then allow Coil Cleaner to stand in the heat exchanger system for 15 minutes. After flush, rinse system with clean water and dispose of Coil Cleaner in an appropriate receptacle.


This procedure should be repeated every 50-100 hours of unit operation depending on water conditions in your

area. In some individual truckmount systems it may be necessary to perform a flush more often or for longer periods than suggested in the directions.

Esteam Coil Cleaner can be used for more than one system flush. Simply store Coil Cleaner solution for the next time a system flush is required. Effectiveness will diminish with the number of times used.

NOTE: Do not mix Esteam Coil Cleaner with any other chemical product.

Keep this product out of reach of children. Read the Material Safety Data Sheet and Product Label before using. Take the necessary precautions dictated by the label to ensure that your health and that of your customers' is protected.

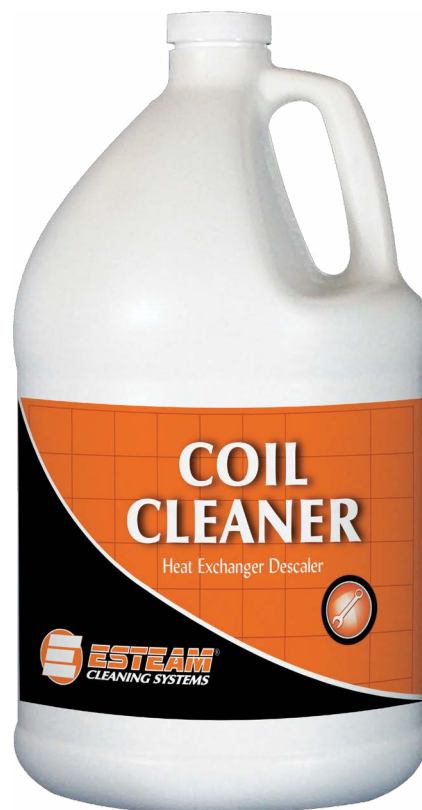

pH: 0.5

Dilution Ratio: Ready to use

www.esteem.com



1-800-653-8338

See Material Safety Data Sheet at www.esteem.com/msds.php